

Flex-Rite™



PHH "SUCTION/TRANSFER HOSE"

...extreme low temperature flexibility!

PHH is a clear hose, reinforced with white helix rod and is compliant with 3A¹, USDA² & FDA⁴ standards. Its extreme low temperature flexibility is ideal for use in milk hauling.

Features:

- Light Weight
- Clear Viewing of Product Flow
- Low Temperature Flexibility
- Phthalate FREE
- Higher Working Pressures

Applications:

- Food Grade Liquids
- Beer, Wine & Juice
- Potable Water
- Poultry Processing
- Milk & Dairy Transfer
- Milk Hauling
- Ice Transfer

WARNING: Working pressure ratings for all Flex-Rite™ Products are based on 70° F (ambient temperature). Working pressure and vacuum ratings will decrease as temperatures increase. For "P" series applications that exceed 100°F contact manufacturer for suggestions.


P-Series hoses are Phthalate (DEHP) FREE

MODEL	I.D.	O.D.	WORKING PRESSURE	MIN. BEND RADIUS	WEIGHT PER FT.	VAC. IN HG.	LENGTH
PHH150	1 1/2"	1.79"	75 PSI	4.0"	.45 lbs.	28"	100'
PHH200	2"	2.33"	75 PSI	5.0"	.65 lbs.	28"	100'
PHH250**	2 1/2"	2.87"	55 PSI	8.0"	.84 lbs.	28"	100'
PHH300**	3"	3.42"	55 PSI	11.0"	1.18 lbs.	28"	100'

TUBE FDA, 3-A*, UHMW-PVC
REINFORCEMENT White wire helix

COVER Clear
TEMP. RANGE -40 to 150° F

PHH Suction/Transport Hose

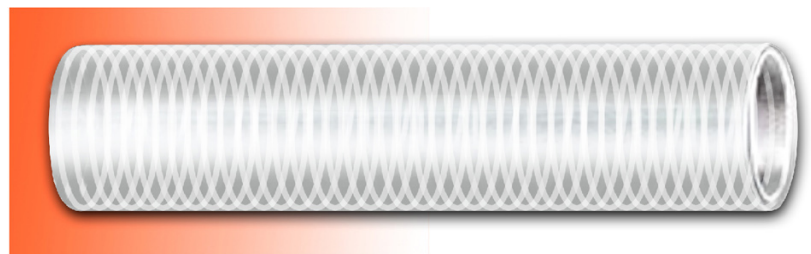

¹3A- The PVC compound complies with the criteria in 3-A Sanitary Standards for Multiple-Use Plastic Materials, number 20.

²USDA - The PVC hose has been found chemically acceptable for use in slaughtering, processing, transporting, or storage areas in direct contact with meat or poultry food product prepared under Federal Inspection.

⁴FDA - The PVC ingredients used are sanctioned for food contact use under CFR title 21, parts 170-199 or FD&C Act, section 409(h), notifications relating to food contact substance.

**Bulk Only (Fittings not available)

Note: PHH & PHC available with reusable fittings only



513-889-2118 • 855-357-4110 • 513-889-2125 FAX

5452 Spellmire Dr, Cincinnati, OH 45246

www.acesanitary.com

ASPBT31418